



BYPASS RAMP






CONTENTS

PAGE	
3	Features
4	Dimensions and weights
5	Usage and installation
6	Load deflection data
7	Slip resistance
8	Inspection and maintenance
9	Branding and customisation
10	Contact information





FEATURES

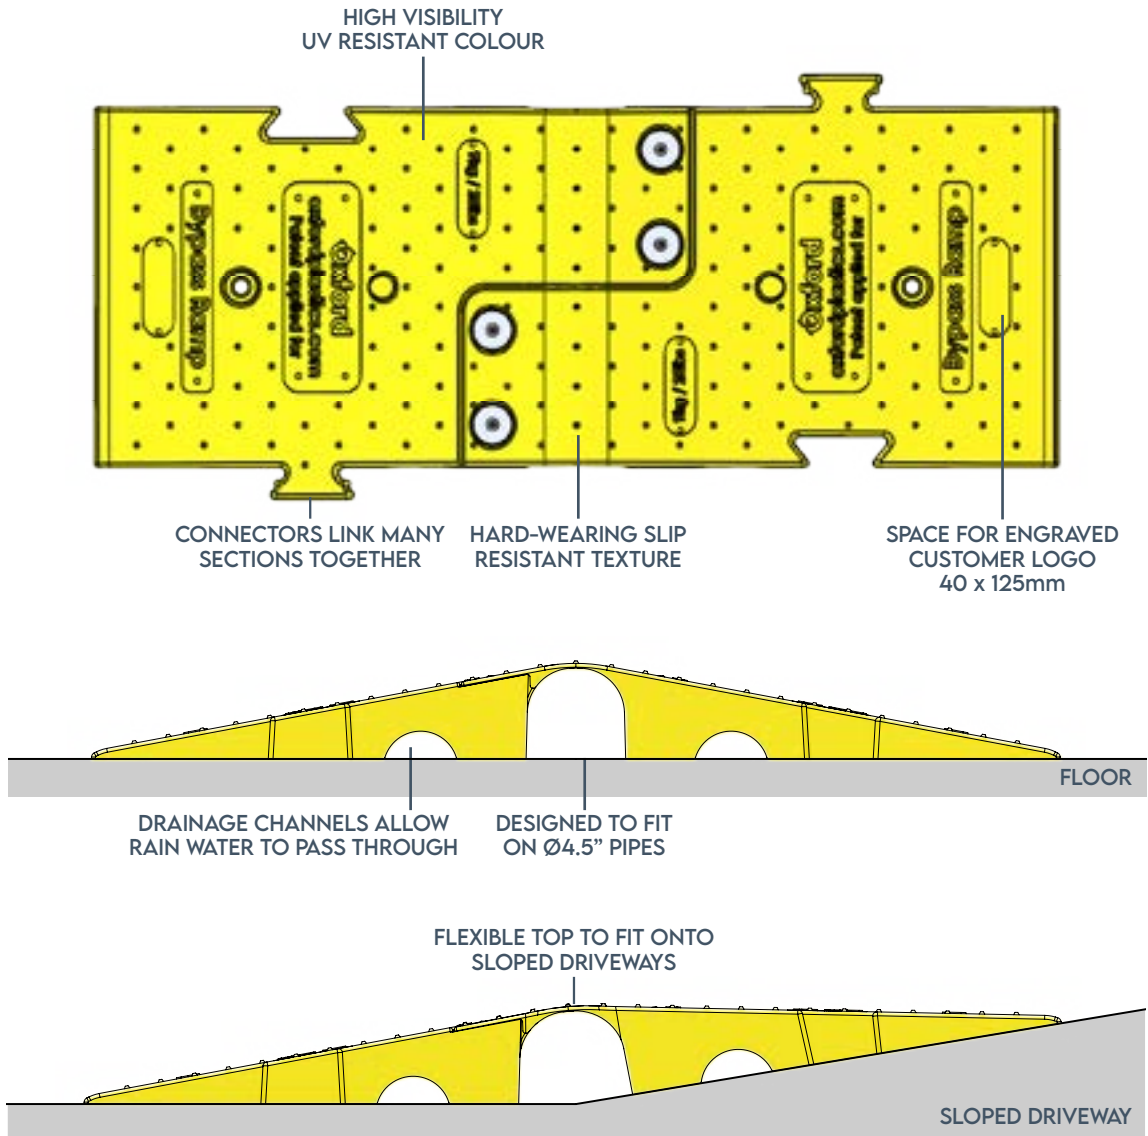

FEATURES

- 44t / 97,000lb vehicle load bearing for up to Ø4.5” load bearing pipes.
- 44t / 97,000lb vehicle load bearing up to Ø3.5” pipes which are not load bearing.
- Anchor points to secure to the ground.
- Slip resistant surface.
- Highly visible.
- One person installation.

END USER BENEFITS


- Eliminates asphalt cold patch ramps.
- Gives ramped access to homes.
- Installed in minutes.
- Adaptable to sloped driveways.
- Reusable, repairable & recyclable.
- Save on equipment & material costs over lifetime of use.





DIMENSIONS AND WEIGHTS

BYPASS RAMP 9kg / 20lb

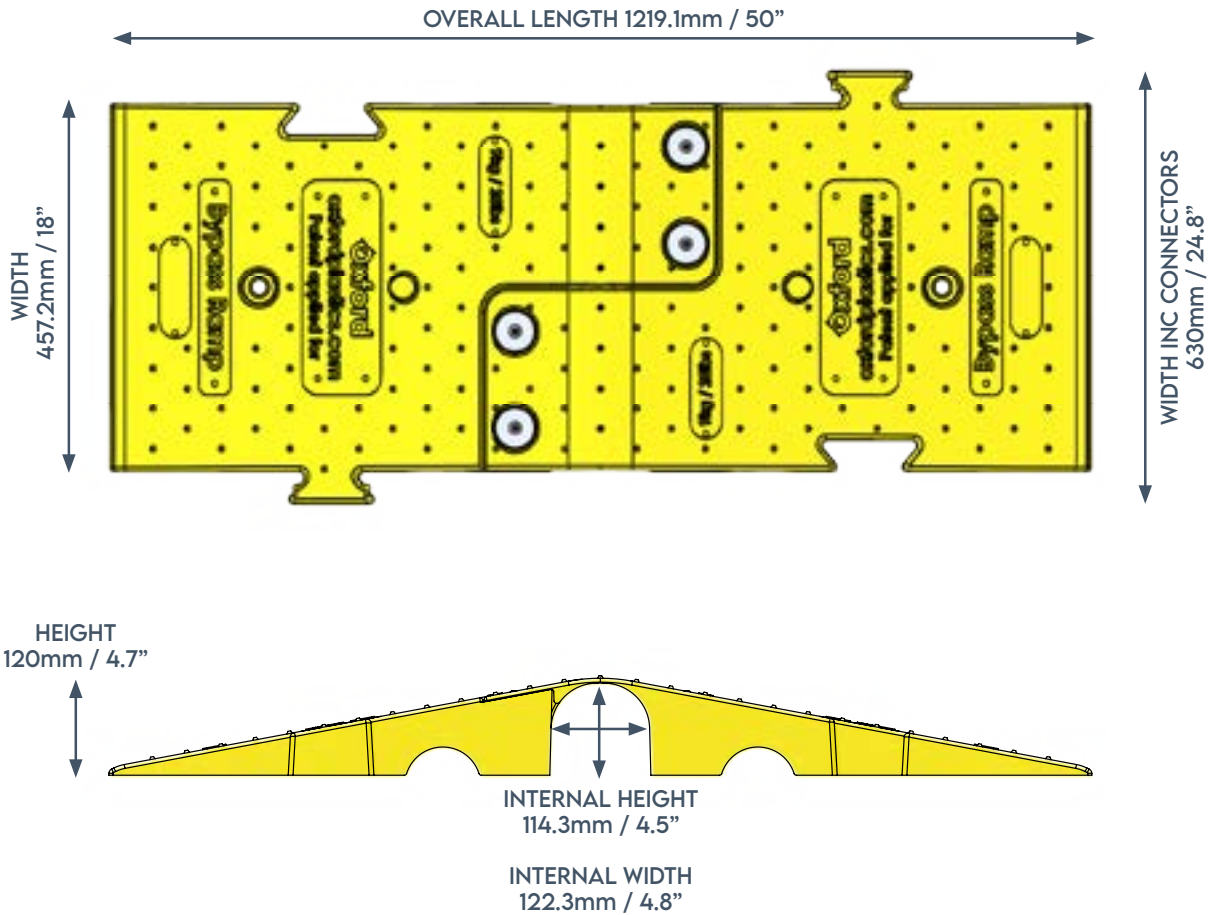


Part Name	Product Code
Bypass Ramp	O920




USAGE AND INSTALLATION

Risk assessments must be carried out to ensure the usage is suitable for the scenario.

Every section has the facility to be bolted down individually. The SSRA must advise whether bolts are necessary for the installation.

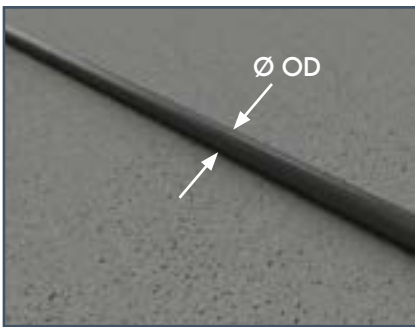

Confirm pipe size is suitable:
Up to Ø3.5" OD non-load bearing pipe
Up to Ø4.5" OD load bearing pipe

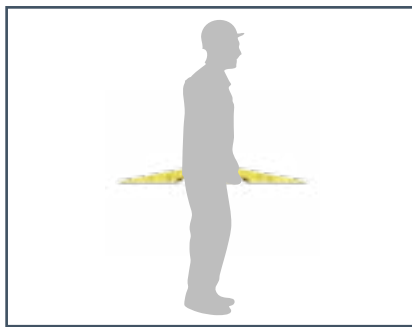


One person lift.




Place first Bypass Ramp section centrally over the pipe.



Place the next Bypass Ramp section, linking to the first using the integral connectors.

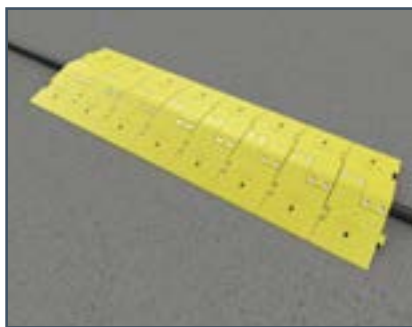

Continue linking Bypass Ramp sections until desired length is achieved. Each section is 1 1/2' wide.

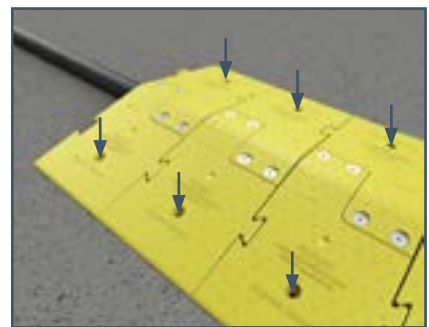

Bolt down sections down as necessary dependant on SSRA.

Every section has the facility to be bolted down individually.

The Bypass Ramps are designed for vehicles to travel across in a straight line. Ramps are securely bolted down, the bolt holes accept M16 x 150mm & 5/8" x 6" Masonry Anchor bolts.





LOAD DEFLECTION DATA

Testing has been carried out by trained staff at Oxford Plastics' specialist testing facility.



PRODUCT RATING

The product is rated for use by vehicles with a GVW of up to

**44t /
97,000lb**

- 3.5" or smaller diameter pipes that cannot bear a single load of 6t / 13,200lb themselves can safely be used.
- Larger diameter pipes must be capable of bearing or withstanding the 6t / 13,200lb single wheel loads themselves.

TEST SPECIFICATION

Load
6t / 13,200lb

Load Footprint
250mm / 9.8" diameter pad with rubber base to simulate single tyre.

Load Location
Centre of product.





SLIP RESISTANCE

Slip resistance testing has been carried out by an independent test house, in line with the requirements of:

- ASTM American Society for Testing and Materials Method E303-22 (2022), “Standard Test Method for Measuring Surface Frictional Properties Using the British Pendulum Tester”
- UK HSE 2012 document ‘Testing the slip resistance of flooring’.

Testing was carried out in 4 directions in wet and dry conditions, using a calibrated Munro slip tester using Slider 55.



CLASSIFICATIONS

High Slip Potential
0-24

Moderate Slip Potential
25-35

Low Slip Potential
36+

END MOULDING (RAMP)	Median Result PTV	Slip Potential Classification
Dry	103	LOW SLIP POTENTIAL 1 : 1,000,000
Wet	39	LOW SLIP POTENTIAL 1 : 1,000,000






INSPECTION AND MAINTENANCE

Before each use, inspect the Bypass Ramp for any signs of damage due to improper use.

Signs of damage may include but are not limited to:


- Cracks on the surface or on the ribs
- Fasteners have loosened
- Warped ramp that no longer fits over pipes

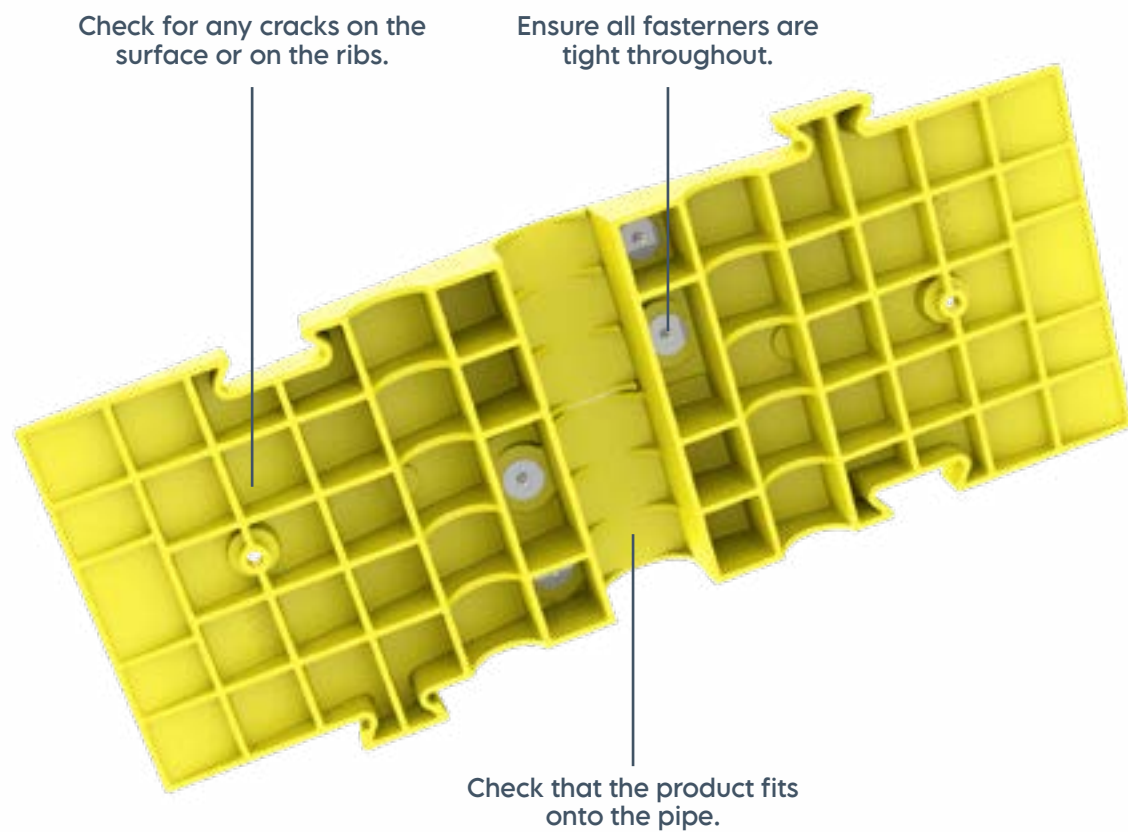



BRANDING AND CUSTOMISATION

	Standard Colour	Non-standard Colours	Embossing
Bypass Ramp	Yellow	RAL Colours, MOQs apply	Customer Embossing Area 40 x 125mm, MOQs apply

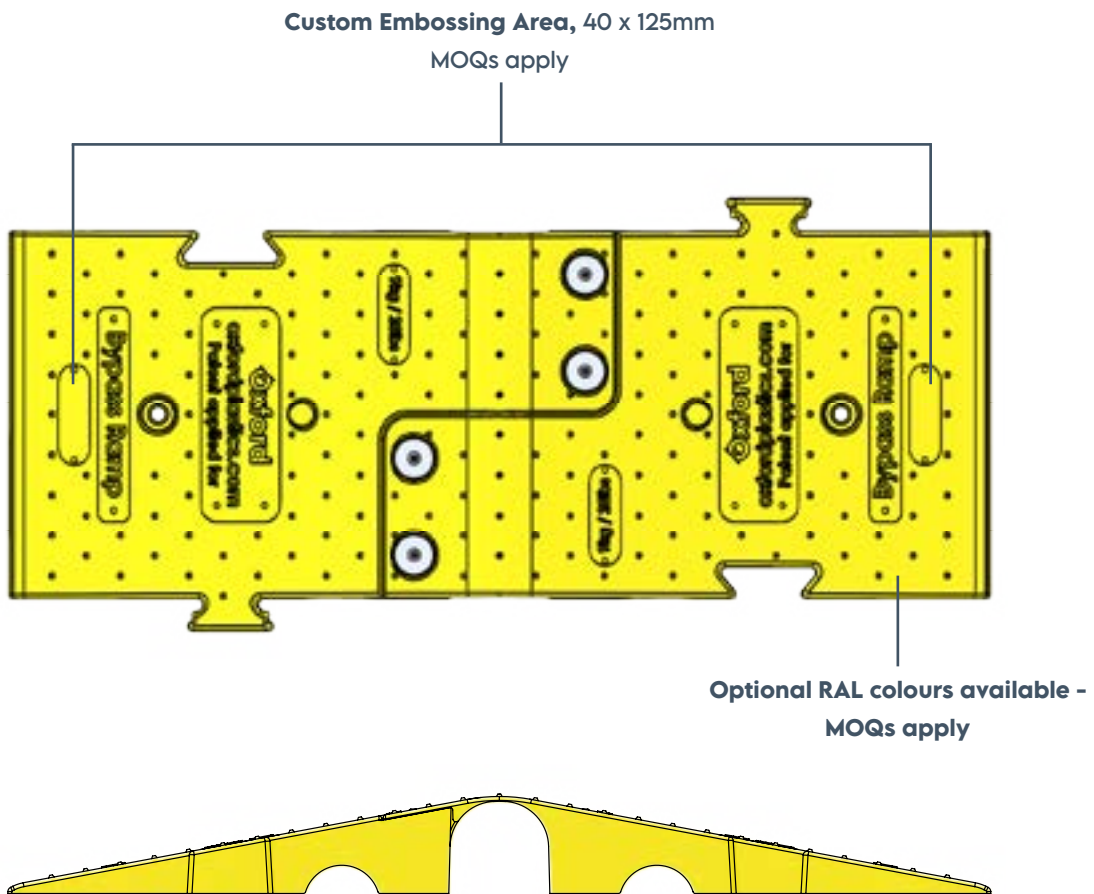



CONTACT INFORMATION

UK & R.O.W

Oxford Plastic Systems Ltd
Unit T2, Enstone Business Park
Enstone,
Chipping Norton
Oxfordshire
OX7 4NP
United Kingdom

sales@oxfordplastics.com
Tel: +44(0)1608 678888

USA

Oxford Plastic Systems LLC
1011 Centre Rd,
Suite 312,
Wilmington
DE
19805
USA

info@oxfordplasticsusa.com
1-800-567-9182

